



JCS7N65EI

主要参数MAIN CHARACTERISTICS

I_D	7A
V_{DS}	650V
$R_{DS(on)-max}$ ($V_{GS}=10V$)	0.95 Ω typ 1.10 Ω max
Q_g-Typ	23.3nC

用途

- 高频开关电源
- 电子镇流器
- LED 电源

APPLICATIONS

- High efficiency switch mode power supplies
- Electronic lamp ballasts based on half bridge
- LED power supplies


产品特性

- 低栅极电荷
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品

FEATURES

- Low gate charge
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

封装 Package

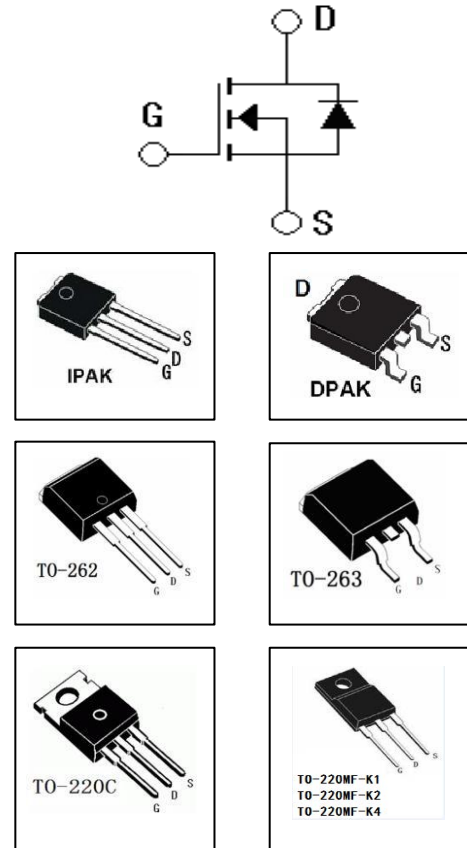

订货信息 ORDER MESSAGE

订货型号 Order codes				印记 Marking	封装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
N/A	JCS7N65VEI-V-BR	N/A	N/A	JCS7N65V	IPAK
N/A	JCS7N65REI-R-BR	N/A	JCS7N65REI-R-AR	JCS7N65R	DPAK
JCS7N65BEI-B-B	JCS7N65BEI-B-BR	N/A	N/A	JCS7N65B	TO-262
JCS7N65SEI-S-B	JCS7N65SEI-S-BR	JCS7N65SEI-S-A	JCS7N65SEI-S-AR	JCS7N65S	TO-263
JCS7N65CEI-C-B	JCS7N65CEI-C-BR	N/A	N/A	JCS7N65C	TO-220C
JCS7N65FEI-F1-B	JCS7N65FEI-F1-BR	N/A	N/A	JCS7N65F	TO-220MF-K1
JCS7N65FEI-F2-B	JCS7N65FEI-F2-BR	N/A	N/A	JCS7N65F	TO-220MF-K2
JCS7N65FEI-F4-B	JCS7N65FEI-F4-BR	N/A	N/A	JCS7N65F	TO-220MF-K4



绝对最大额定值ABSOLUTE RATINGS($T_c=25^{\circ}\text{C}$)

项 目 Parameter	符 号 Symbol	数 值 Value		单 位 Unit
		JCS7N65 CEI/SEI/BEI/VEI/REI	JCS7N65FEI K1/K2/K4	
最高漏极-源极直流电压 Drain-Source Voltage	V_{DSS}	650	650	V
连续漏极电流 Drain Current -continuous	I_{D} $T=25^{\circ}\text{C}$ $T=100^{\circ}\text{C}$	7.0	7.0*	A
		4.6	4.6*	A
最大脉冲漏极电流 (注1) Drain Current - pulse (note 1)	I_{DM}	28	28*	A
最高栅源电压 Gate-Source Voltage	V_{GSS}	± 30		V
单脉冲雪崩能量 (注2) Single Pulsed Avalanche Energy (note 2)	E_{AS}	360		mJ
二极管反向恢复最大电压变化速率 (注3) Peak Diode Recovery dv/dt (note 3)	dv/dt	1.28		V/ns
耗散功率 Power Dissipation	P_{D} $T_c=25^{\circ}\text{C}$ -Derate above 25°C	120.0	41.6	W
		1.04	0.33	W/ $^{\circ}\text{C}$
最高结温及存储温度 Operating and Storage Temperature Range	$T_{\text{J}}, T_{\text{STG}}$	$-55 \sim +150$		$^{\circ}\text{C}$
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T_{L}	300		$^{\circ}\text{C}$

*漏极电流由最高结温限制

*Drain current limited by maximum junction temperature





电特性 ELECTRICAL CHARACTERISTICS

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
关态特性 Off –Characteristics						
漏—源击穿电压 Drain-Source Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	650	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$, referenced to 25°C	-	0.65	-	V/°C
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V, T_C=25^\circ C$	-	-	10	μA
		$V_{DS}=520V, T_C=125^\circ C$	-	-	100	μA
正向栅极体漏电流 Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D=250\mu A$	3.0	-	5.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=3.5A, 25^\circ C$	-	0.95	1.10	Ω
正向跨导 Forward Transconductance	g_{fs}	$V_{DS}=40V, I_D=3.5A$ (note 4)	-	5.2		S
动态特性 Dynamic Characteristics						
栅极电阻 Gate resistance	R_g	$F=1.0MHz$ open drain	0.8	1.9	4.0	Ω
输入电容 Input capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	904	-	pF
输出电容 Output capacitance	C_{oss}		-	116	-	pF
反向传输电容 Reverse transfer capacitance	C_{rss}		-	9	-	pF





电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics						
延迟时间 Turn-On delay time	t _{d(on)}	V _{DD} =325V,I _D =7A,R _G =25Ω (note 4, 5)	-	24.2	-	ns
上升时间 Turn-On rise time	t _r		-	45.6	-	ns
延迟时间 Turn-Off delay time	t _{d(off)}		-	53	-	ns
下降时间 Turn-Off Fall time	t _f		-	42.4	-	ns
栅极电荷总量 Total Gate Charge	Q _g	V _{DS} =520V ,	-	23.3	-	nC
栅—源电荷 Gate-Source charge	Q _{gs}	I _D =7A	-	6.4	-	nC
栅—漏电荷 Gate-Drain charge	Q _{gd}	V _{GS} =10V (note 4, 5)	-	10.7	-	nC
漏—源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings						
正向最大连续电流	I _S		-	-	7.0	A
Maximum Continuous Drain -Source Diode Forward Current						
正向最大脉冲电流	I _{SM}		-	-	28	A
Maximum Pulsed Drain-Source Diode Forward Current						
正向压降	V _{SD}	V _{GS} =0V, I _S =7.0A	-	-	1.4	V
Drain-Source Diode ForwardVoltage						
反向恢复时间	t _{rr}	V _{GS} =0V, I _S =7.0A dI _F /dt=100A/μs (note 4)	-	347	-	ns
Reverse recovery time						
反向恢复电荷	Q _{rr}		-	2.75	-	μC
Reverse recovery charge						

热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最大 Max		单 位 Unit
		JCS7N65VEI /REI/CEI/SEI/BEI	JCS7N65FEI TO-220MF-K1/K2/K4	
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	1.04	3	$^{\circ}C/W$
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	62.5	49.3	$^{\circ}C/W$

注释:


- 1: 脉冲宽度由最高结温限制
- 2: $L=15mH, I_{AS}=7A, V_{DD}=50V, R_G=25\Omega$, 起始结温 $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 7A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, 起始结温 $T_J=25^{\circ}C$
- 4: 脉冲测试: 脉冲宽度 $\leq 300\mu s$, 占空比 $\leq 2\%$
- 5: 基本与工作温度无关

Notes:

- 1: Pulse width limited by maximum junction temperature
- 2: $L=15mH, I_{AS}=7A, V_{DD}=50V, R_G=25\Omega$, Starting $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 20A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^{\circ}C$
- 4: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
- 5: Essentially independent of operating temperature




特征曲线ELECTRICAL CHARACTERISTICS (curves)

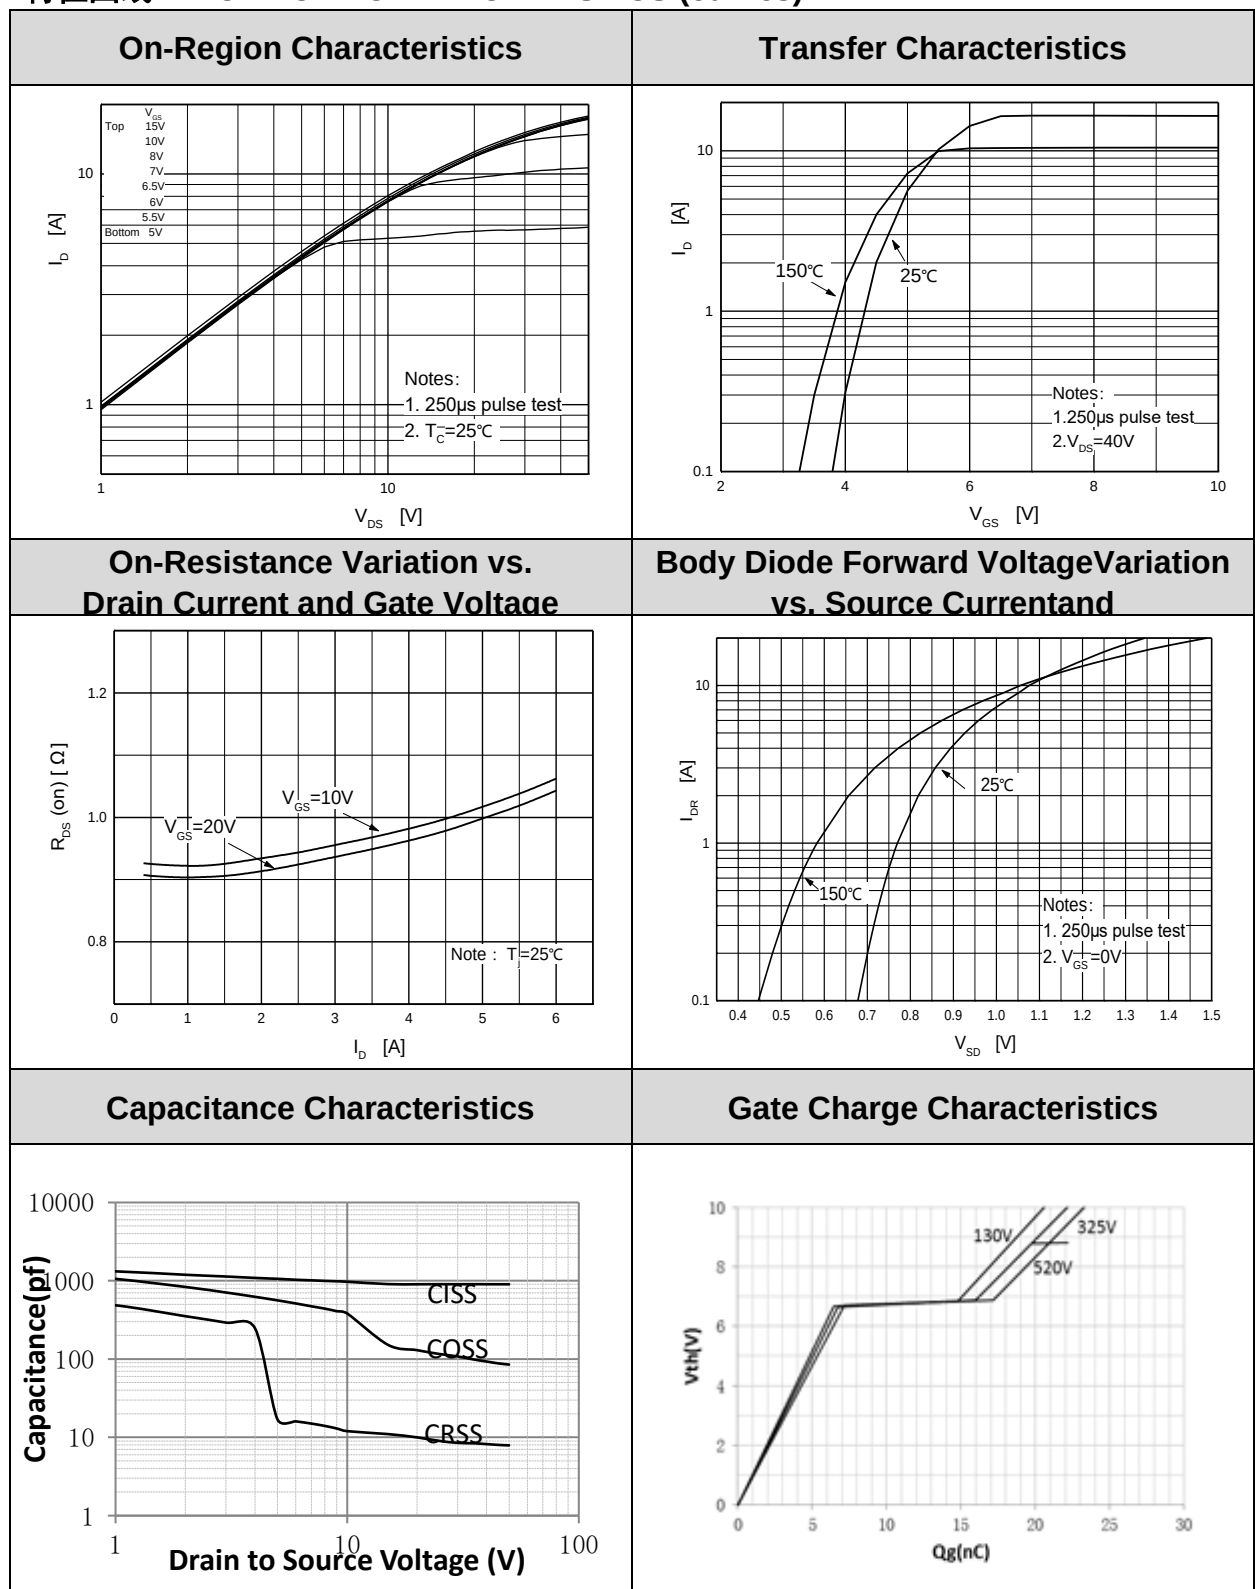


特征曲线ELECTRICAL CHARACTERISTICS (curves)


Breakdown Voltage Variation vs. Temperature

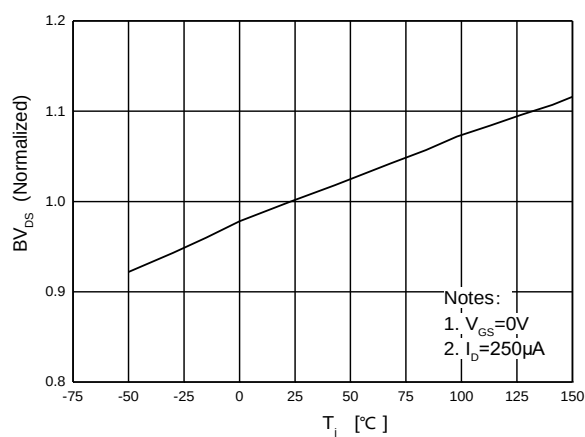


On-Resistance Variation vs. Temperature

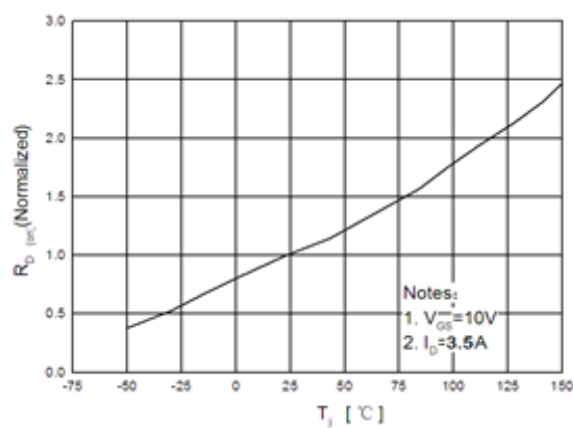


Maximum Drain Current vs. Case Temperature

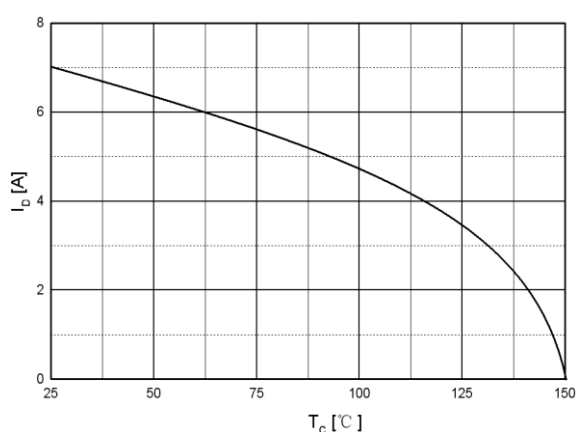


Avalanche Energy vs. Temperature

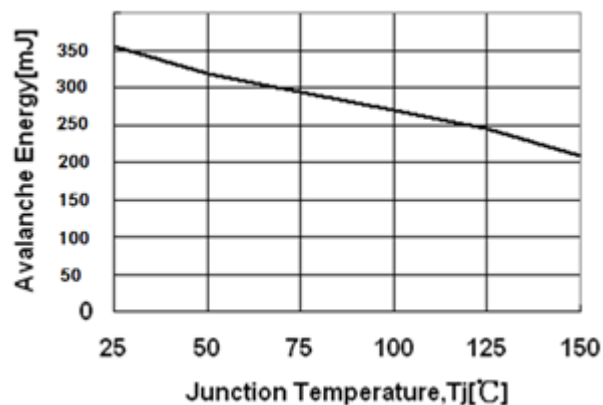

Maximum Safe Operating Area For JCS7N65CEI/SEI/BEI/REI/VEI

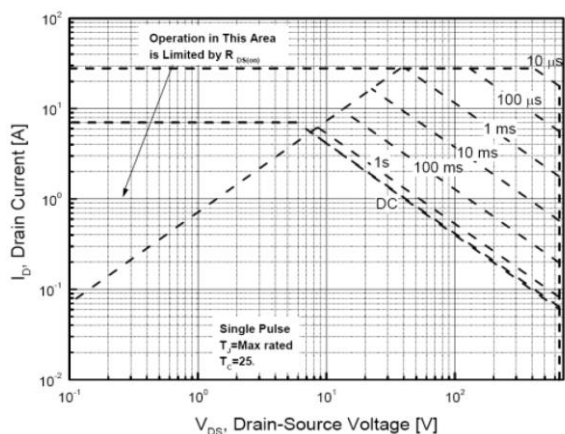


Maximum Safe Operating Area For JCS7N65FEI(TO-220MF-K1/K2/K4)

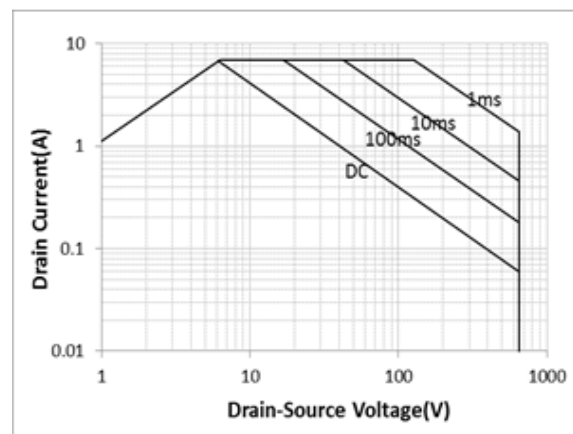


特征曲线ELECTRICAL CHARACTERISTICS (curves)

**Transient Thermal Response Curve
For JCS7N65CEI/SEI/BEI/REI/VEI**

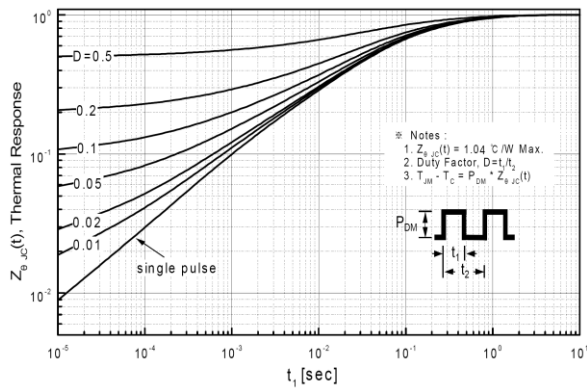


**Transient Thermal Response Curve
For JCS7N65FEI(TO-220MF-K1/K2/K4)**

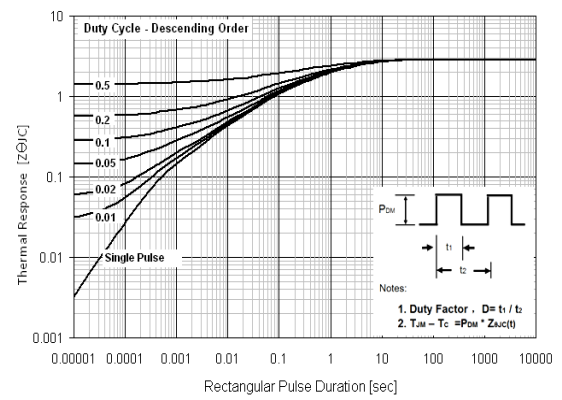

外形尺寸 PACKAGE MECHANICAL DATA

IPAK

单位 Unit: mm

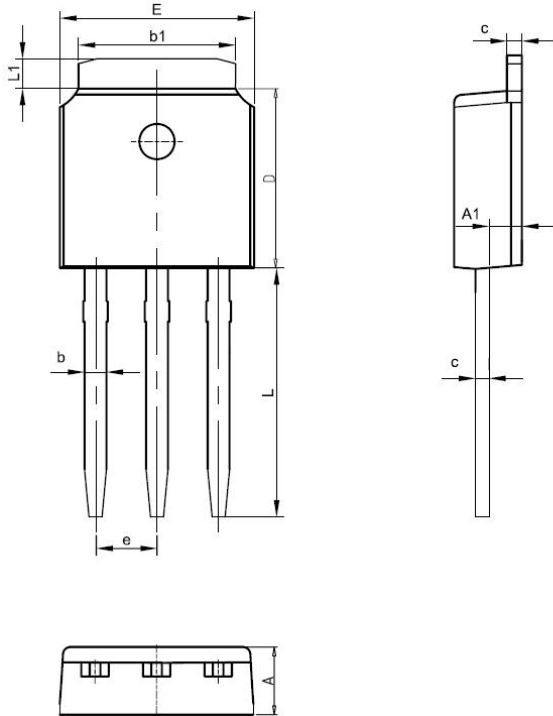


SYMBOL	MM	
	MIN	MAX
A	2.1	2.5
A1	0.87	1.27
b	0.63	0.93
b1	5.13	5.53
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
L	9.10	9.70
e	2.286BSC	
L1	0.82	1.22



外形尺寸 PACKAGE MECHANICAL DATA


DPAK

单位 Unit: mm

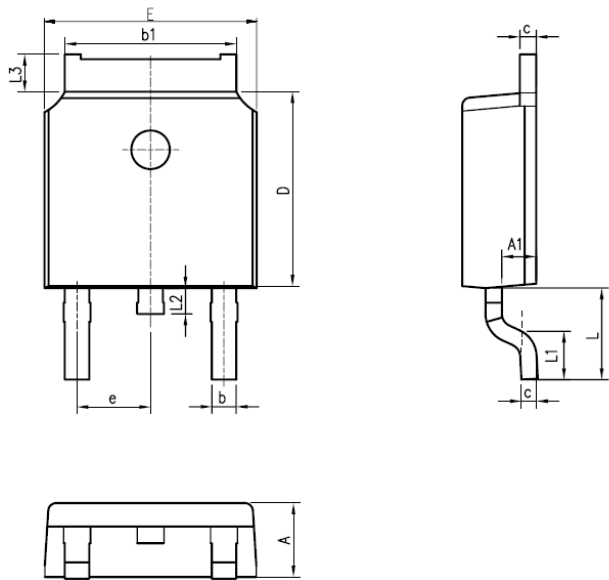

SYMBOL	mm	
	MIN	MAX
A	2.10	2.50
A1	0.97	1.17
b	0.63	0.93
b1	5.13	5.53
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
e	2.286BSC	
L	2.50	3.30
L1	1.20	1.80
L2	0.60	1.00
L3	0.85	1.30


编带 REEL

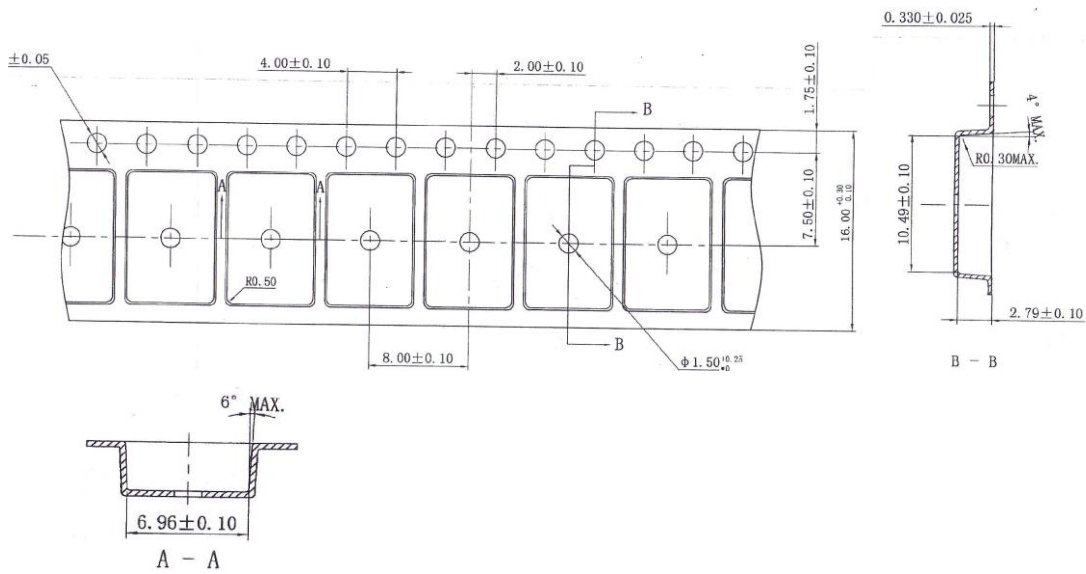

外形尺寸 PACKAGE MECHANICAL DATA

TO-220C

单位 Unit: mm


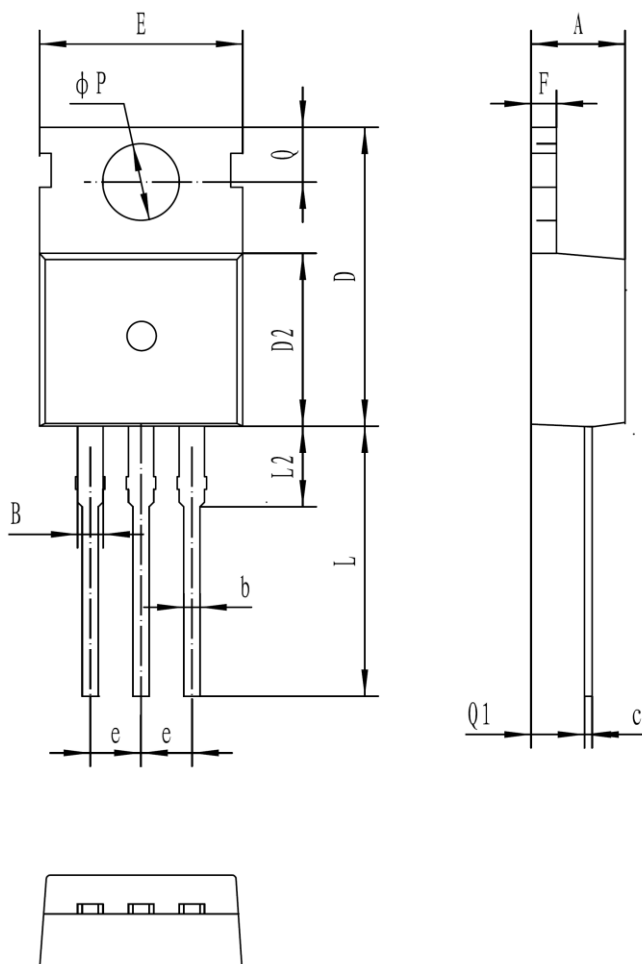


符号 symbol	MIN	MAX
A	4.30	4.70
B	1.10	1.40
b	0.70	0.95
c	0.40	0.65
D	15.20	16.20
D2	9.00	9.40
E	9.70	10.10
e	2.39	2.69
F	1.25	1.40
L	12.60	13.60
L2	2.80	3.20
Q	2.60	3.00
Q1	2.20	2.60
P	3.50	3.80


外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K1

单位 Unit: mm

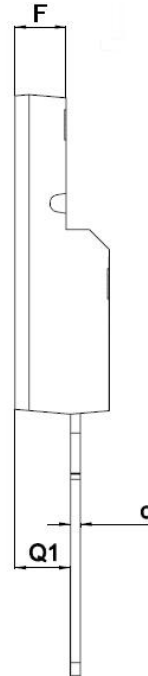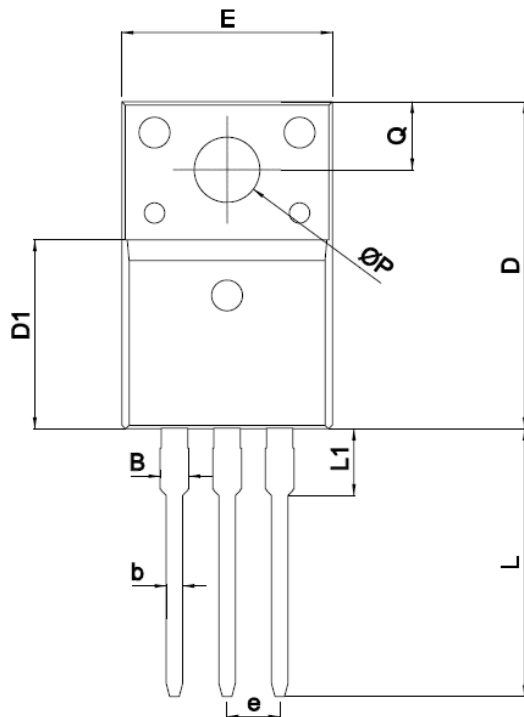


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K2

单位 Unit: mm

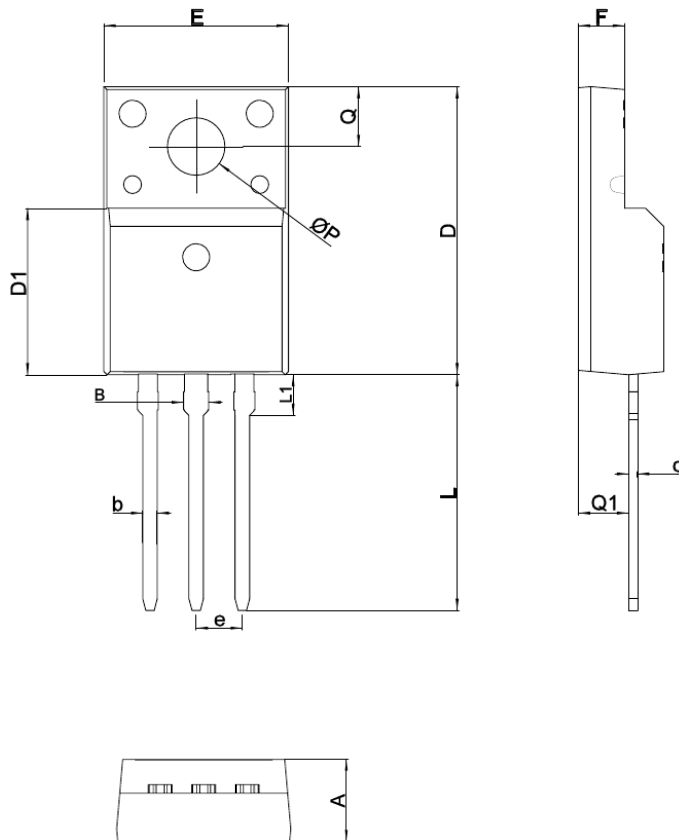


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.27
b	0.59	0.79
c	0.45	0.60
D	15.67	16.07
D1	8.97	9.37
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.65	13.35
L1	1.80	2.20
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28

外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K4

单位 Unit: mm

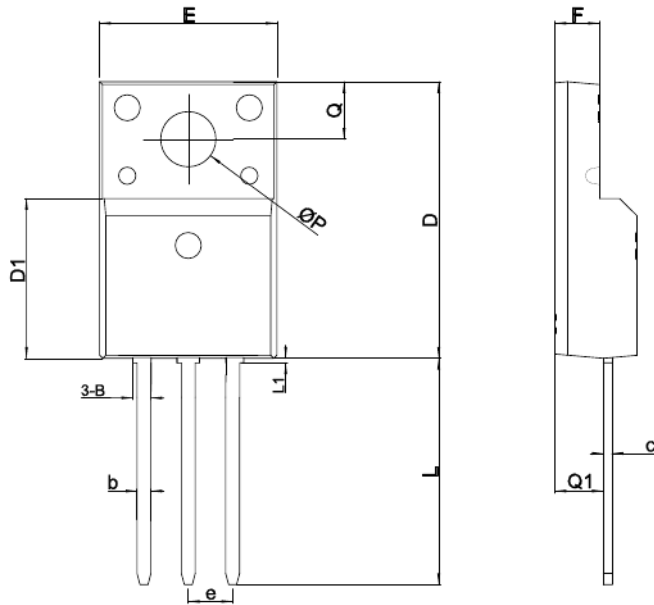


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B	1.04	1.24
b	0.59	0.79
c	0.45	0.60
D	15.67	16.07
D1	8.97	9.37
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.65	13.35
L1	MAX 0.95	
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28




外形尺寸 PACKAGE MECHANICAL DATA

TO-262

单位 Unit: mm

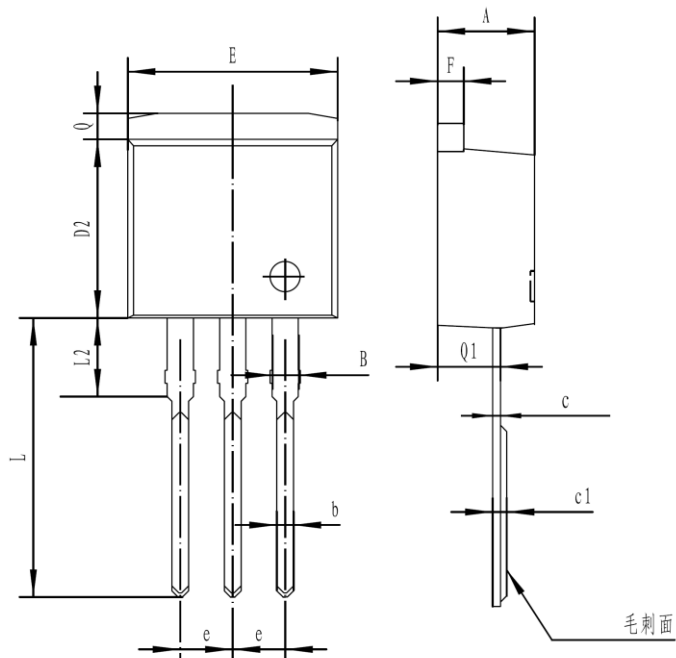

符号 symbol	MIN	MAX
A	4.40	4.90
B	1.10	1.40
b	0.70	0.95
c	0.30	0.60
c1	0.33	0.63
D2	8.20	9.20
E	9.60	10.50
e	2.39	2.69
F	1.20	1.35
L	13.11	14.61
L2	3.55	4.05
Q	1.10	1.40
Q1	2.65	2.85






外形尺寸 PACKAGE MECHANICAL DATA



TO-263

单位 Unit: mm

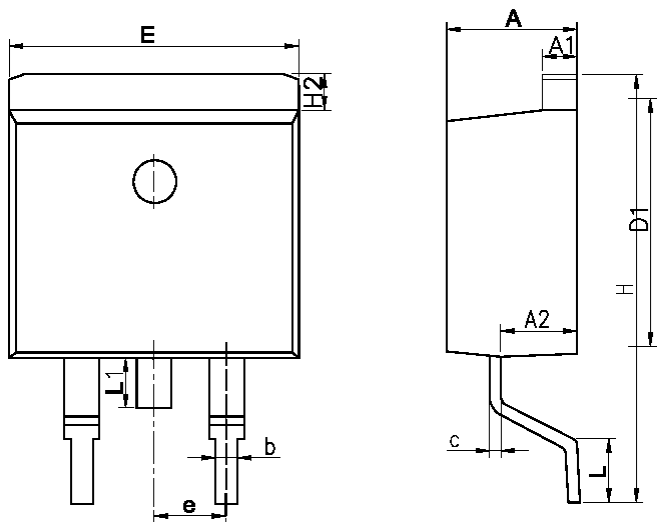

SYMBOL	MM	
	MIN	MAX
A	4.30	4.80
A1	1.12	1.42
A2	2.54	2.84
b	0.67	1.00
c	0.29	0.52
D1	8.40	9.00
E	9.80	10.46
e	2.54BSC	
H	14.00	16.00
H2	1.12	1.45
L	1.50	3.10
L1	1.45	1.70

编带 REEL

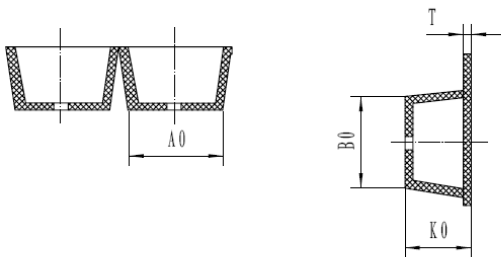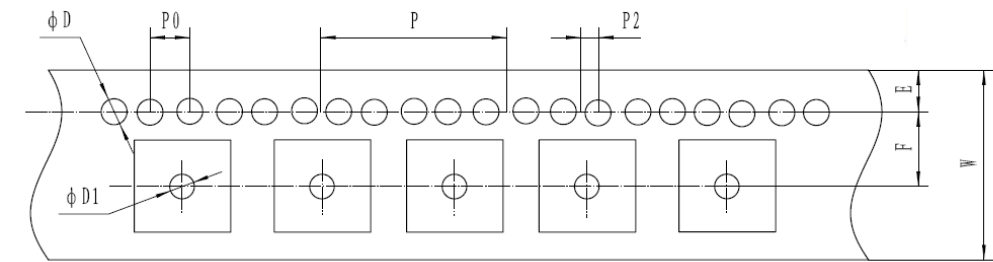

产品尺寸规格 (UNIT:mm)				
规格 W	A0	E	F	D
尺寸 24 ± 0.3	10.9 ± 0.1	1.75 ± 0.1	11.5 ± 0.1	1.5 +0.1/-0
规格 D1	P0	P2	P	T
尺寸 1.5 +0.1/-0	4 ± 0.1	2 ± 0.1	16 ± 0.1	0.35 ± 0.05
规格 K0	B0			
尺寸 4.9 ± 0.1	16.0 ± 0.1			

注意事项

1. 吉林华微电子股份有限公司的产品销售分为直销和销售代理，无论哪种方式，订货时请与公司核实。
2. 购买时请认清公司商标，如有疑问请与公司本部联系。
3. 在电路设计时请不要超过器件的绝对最大额定值，否则会影响整机的可靠性。
4. 本说明书如有版本变更不另外告知。

NOTE

1. Jilin Sino-microelectronics co., Ltd sales its product either through direct sales or sales agent , thus, for customers, when ordering , please check with our company.
2. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
3. Please do not exceed the absolute maximum ratings of the device when circuit designing.
4. Jilin Sino-microelectronics co., Ltd reserves the right to make changes in this. specification sheet and is subject to change without prior notice.

联系方式

吉林华微电子股份有限公司

公司地址：吉林省吉林市深圳街 99 号

邮编：132013

总机：86-432-64678411

传真：86-432-64665812

网址：www.hwdz.com.cn

CONTACT

JILIN SINO-MICROELECTRONICS CO., LTD.

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64678411

Fax: 86-432-64665812

Web Site: www.hwdz.com.cn