



TT075N120EBC

主要参数 MAIN CHARACTERISTICS

I _c	75A
V _{CE} S	1200V
V _{cesat-typ}	1.8V

用途

- 逆变器
- UPS 电源

APPLICATIONS

- General purpose Inverters
- UPS

产品特性


- 低栅极电荷
- Trench FS 技术
- 通态压降, V_{cesat},
typ=1.8V I_c=75Aand
T_c=25℃
- RoHS 产品
- 内置 SIC 二极管

FEATURES


- Low gate charge
- Trench FS Technology
- Saturation voltage:
V_{cesat}, typ=1.8V I_c=75A
and T_c=25℃
- RoHS product
- Build in SIC SBD

封装 Package

TO-247plus



Build in SIC SBD
TO-247plus



订货信息 ORDER MESSAGE

订 货 型 号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
TT075N120EBC-GE-B	TT075N120EBC-GE-BR	N/A	N/A	TT075N120EBC	T0-247plus



绝对最大额定值 ABSOLUTE RATINGS ($T_c=25^{\circ}\text{C}$)

项 目 Parameter	符 号 Symbol	数 值 Value	单 位 Unit
最高集电极—发射极直流电压 Collector-Emmitter Voltage	V_{ces}	1200	V
*连续集电极电流 Collector Current-continuous	I_c	150($T_c=25^{\circ}\text{C}$)	A
		75($T_c=100^{\circ}\text{C}$)	A
最大脉冲集电极极电流 (注 1) Collector Current – pulse (note 1)	I_{CM}	300	A
二极管正向电流 Diode RMS forward current	I_F	90($T_c=25^{\circ}\text{C}$)	A
		60($T_c=100^{\circ}\text{C}$)	A
二极管正向不重复峰值电流 (浪涌电流) Surge non repetitive forward current $t_p=10\text{ ms}$ sinusoidal	I_{FSM}	200	A
栅极发射极电压 Gate-Emmitter Voltage	V_{GES}	± 20	V
耗散功率 Power Dissipation	P_D $T_c=25^{\circ}\text{C}$	750	W
存储温度 Storage Temperature Range	T_{STG}	$-55\sim+150$	$^{\circ}\text{C}$
结温 Junction Temperature Range	T_J	$-55\sim+175$	$^{\circ}\text{C}$
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T_L	300	$^{\circ}\text{C}$

*连续集电极电流由最高结温限制

*Collector current limited by maximum junction temperature





电特性 ELECTRICAL CHARACTERISTICS

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
关态特性 Off –Characteristics						
集电极—发射极击穿电压 Collector-Emmitter Voltage	BV _{CES}	I _C =250μA, V _{GE} =0V	1200	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	ΔBV _{CES} /ΔT _J	I _C =0.5mA, referenced to 25°C	-	0.6	-	V/°C
零栅压下集电极漏电流 Zero Gate Voltage Collector Current	I _{CES}	V _{CE} =1200V, V _{GE} =0V, T _C =25°C	-	-	0.5	mA
		V _{CE} =1200V, V _{GE} =0V, T _C =175°C	-	5	-	mA
正向栅极体漏电流 Gate-body leakage current, forward	I _{GESF}	V _{CE} =0V, V _{GE} =20V	-	-	200	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I _{GESR}	V _{CE} =0V, V _{GE} =-20V	-	-	-200	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	V _{GE(th)}	V _{CE} = V _{GE} , I _C =2.6mA	4.5	-	6.5	V
饱和压降 Collector-Emmitter saturation Voltage	V _{CESAT}	V _{GE} =15V I _C =75A T _C =25°C	-	1.8	2.4	V
		V _{GE} =15V I _C =75A T _C =175°C	-	2.4	-	V
动态特性 Dynamic Characteristics						
输入电容 Input capacitance	C _{ies}	V _{CE} =25V, V _{GE} =0V, f=1.0MHz	-	9000	-	pF
输出电容 Output capacitance	C _{oes}		-	280	-	pF
反向传输电容 Reverse transfer capacitance	C _{res}		-	150	-	pF
栅极电荷总量 Total Gate Charge	Q _g	V _{CC} =600V,I _C =75A, V _{GE} =15 V T _C =25°C	-	278	-	nC
栅极-发射极电荷 Gate to emitter charge	Q _{ge}		-	98	-	
栅极-集电极电荷 Gate to collector charge	Q _{gc}		-	107	-	
栅极电阻-Gate resistance	R _g	f=1 MHz, open collector	-	3	-	Ω
短路电流-short current	I _{sc}	V _{GE} =15V V _{CE} =600V t _{sc} < 10μs	-	385	-	A





电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics						
项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
开启延迟时间 Turn-On delay time	t _{d(on)}	V _{CC} =600V,I _c =75A,R _G =10Ω V _{GE} =15 V, Parasitic ductance=75nH T _C =25℃	-	80	-	ns
上升时间 Turn-On rise time	t _r		-	146	-	ns
关断延迟时间 Turn-Off delay time	t _{d(off)}		-	234	-	ns
下降时间 Turn-Off Fall time	t _f		-	164	-	ns
开通损耗 Turn-On energy	Eon		-	3.7	-	mJ
关断损耗 Turn-off energy	Eoff		-	4.0	-	mJ
总开关损耗 Total switching energy	Etot		-	7.7	-	mJ
开启延迟时间 Turn-On delay time	t _{d(on)}	V _{CC} =600V,I _c =75A,R _G =10Ω V _{GE} =15 V, Parasitic ductance=75nH T _C =175℃	-	74	-	ns
上升时间 Turn-On rise time	t _r		-	138	-	ns
关断延迟时间 Turn-Off delay time	t _{d(off)}		-	272	-	ns
下降时间 Turn-Off Fall time	t _f		-	324	-	ns
开通损耗 Turn-On energy	Eon		-	4.0	-	mJ
关断损耗 Turn-off energy	Eoff		-	6.1	-	mJ
总开关损耗 Total switching energy	Etot		-	10.1	-	mJ
反并联二极管特性及最大额定值 Anti-Parallel Diode Characteristics and Maximum Ratings						
正向压降 Drain-Source Diode Forward Voltage	V _F	V _{GE} =0V, I _S =30A, T _C =25℃	-	1.4	1.8	V
		V _{GE} =0V, I _S =30A, T _C =175℃	-	1.9	2.5	V
反向恢复时间 Diode Reverse recovery time	t _{rr}	V _{GE} =0V, V _R =600V I _F =75A dI _F /dt=480A/μs T _C =25℃	-	52	-	ns
反向恢复电荷 Diode Reverse recovery charge	Q _{rr}		-	550	-	nC
反向恢复电流 Diode Reverse recovery Current	I _{RRM}		-	5	-	A

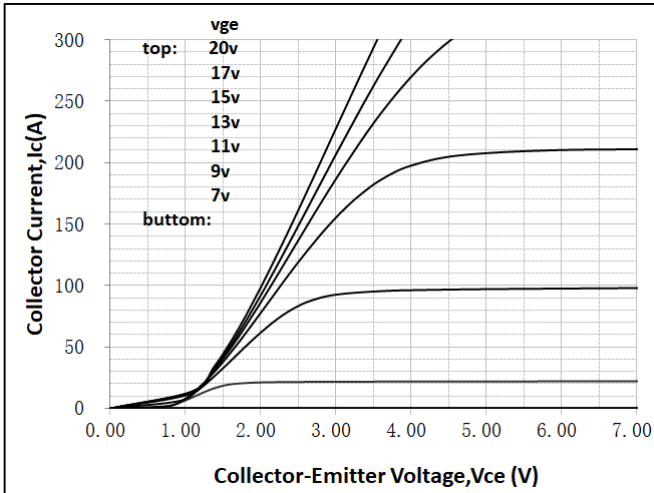
项 目 Parameter	符 号 Symbol	最大值 MAX	单 位 Unit
结到管壳的热阻	$R_{th(j-c)}$	0.2	$^\circ C/W$
Thermal Resistance, Junction to Case			
结到环境的热阻	$R_{th(j-A)}$	40.0	$^\circ C/W$
Thermal Resistance, Junction to Ambient			



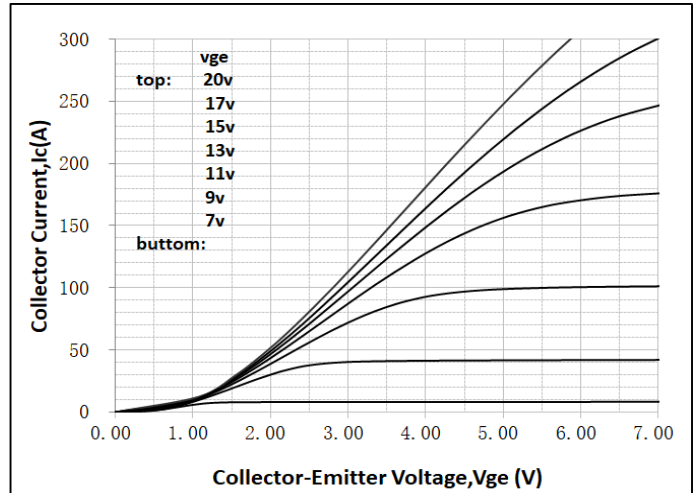


特征曲线 ELECTRICAL CHARACTERISTICS (curves)

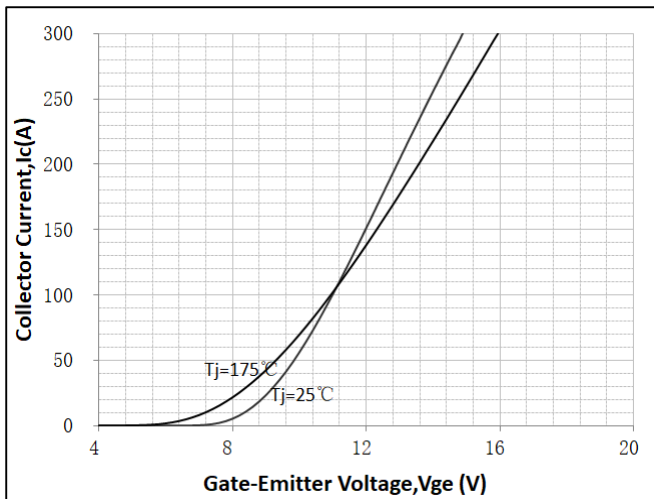
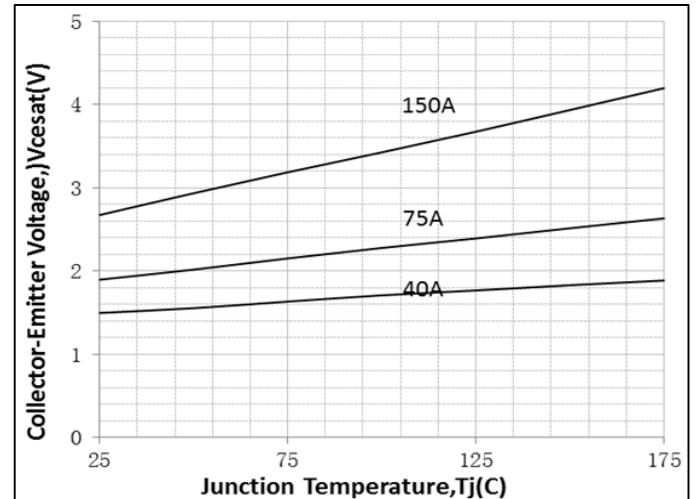
Output Characteristics (25°C)



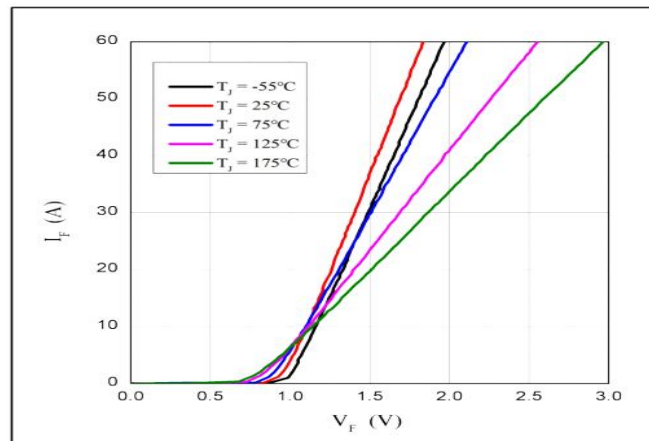
Output Characteristics (175°C)



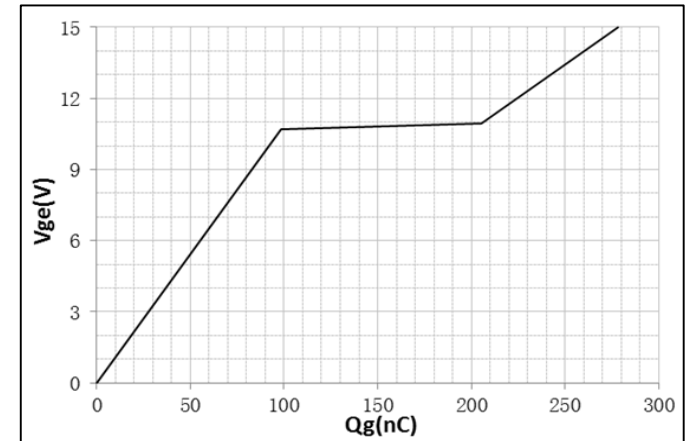
Transfer Characteristics

 V_{cesat} vs. T_j 

Diode Characteristic



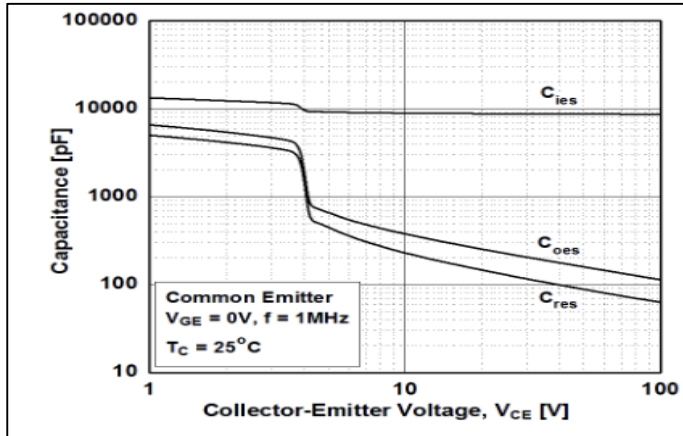
Gate Charge Characteristics

 $V_{ce}=600\text{V}$, $I_c=75\text{A}$ 

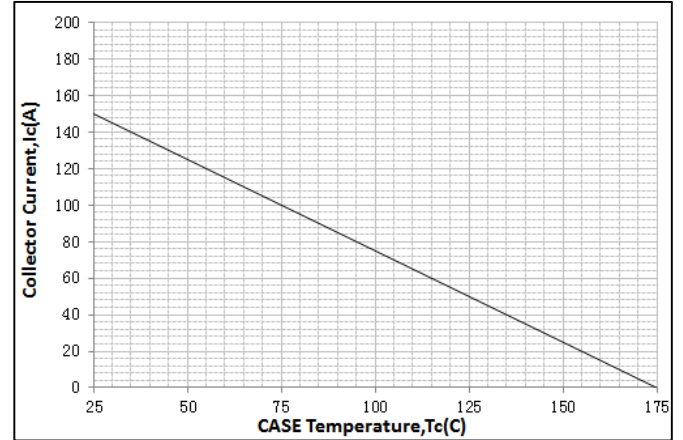


特征曲线 ELECTRICAL CHARACTERISTICS (curves)

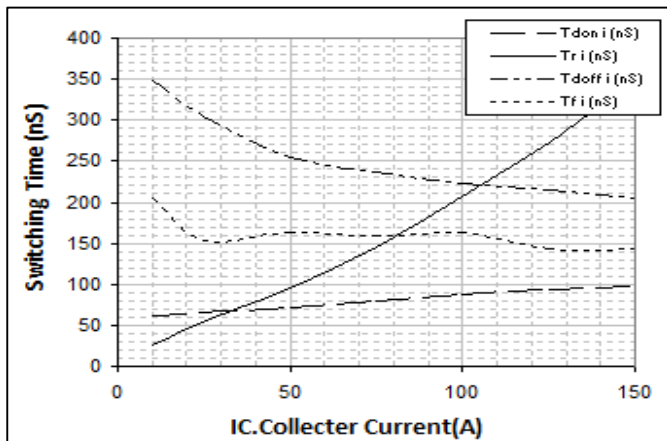
Capacitance Characteristic

 $V_{CE}=25V, V_{GE}=0V, f=1.0MHz$ 

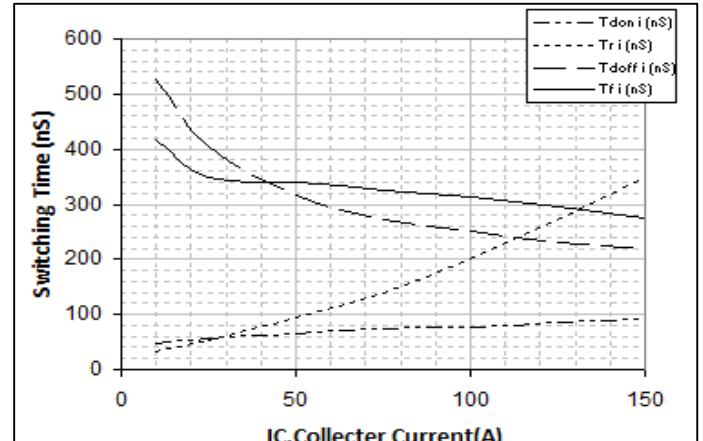
Collector current vs.case temperature

 $V_{GE} \geq 15V, T_j \leq 175^\circ C$ 

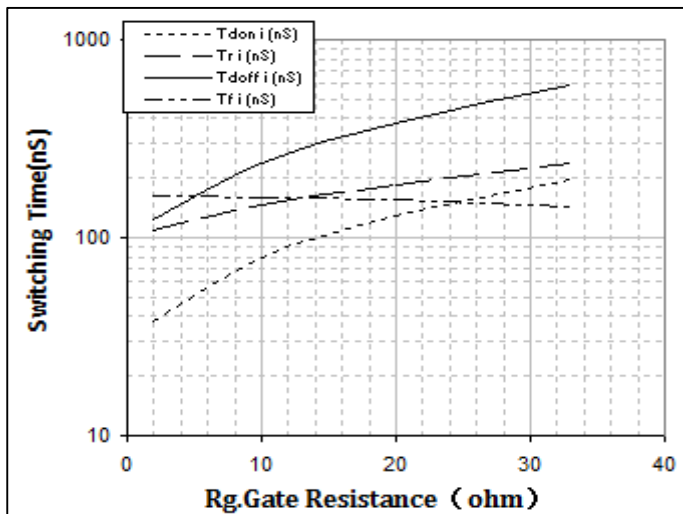
Switching Time vs. I_C(25°C)



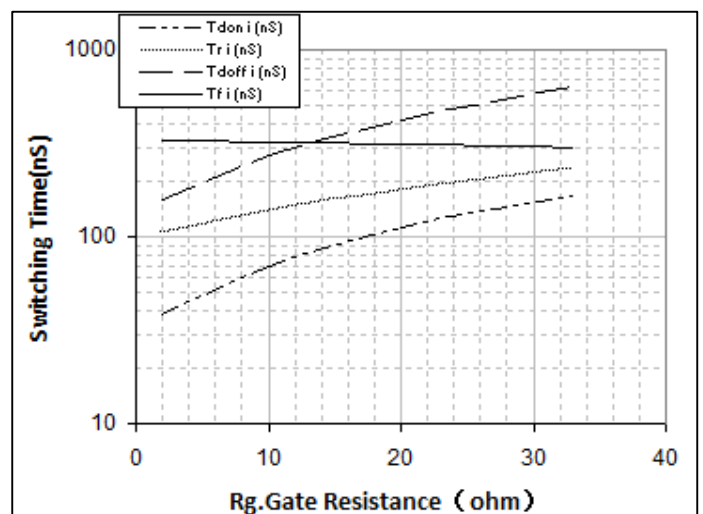
Switching Time vs. I_C(175°C)



Switching Time vs. R_g(25°C)

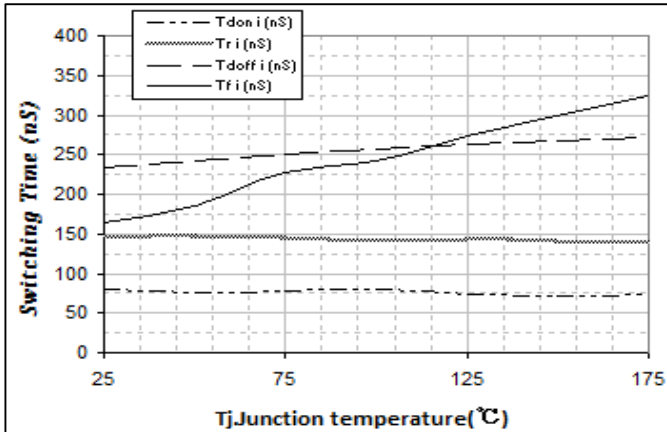
 $V_{GE}=15V, V_{CE}=600V, I_C=75A$ 

Switching Time vs. R_g(175°C)

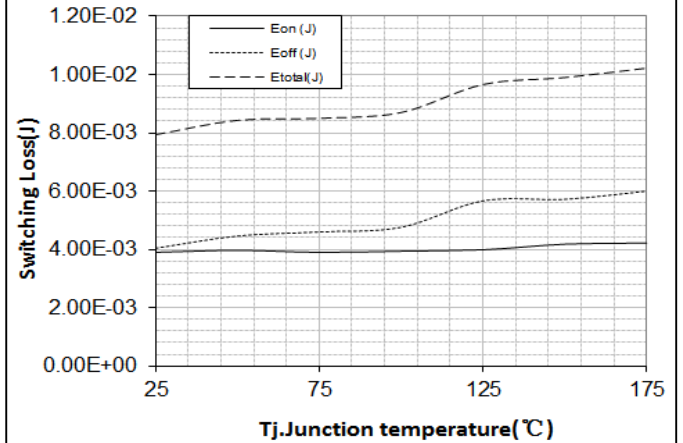
 $V_{GE}=15V, V_{CE}=600V, I_C=75A$ 

**Switching Time vs. Tj**

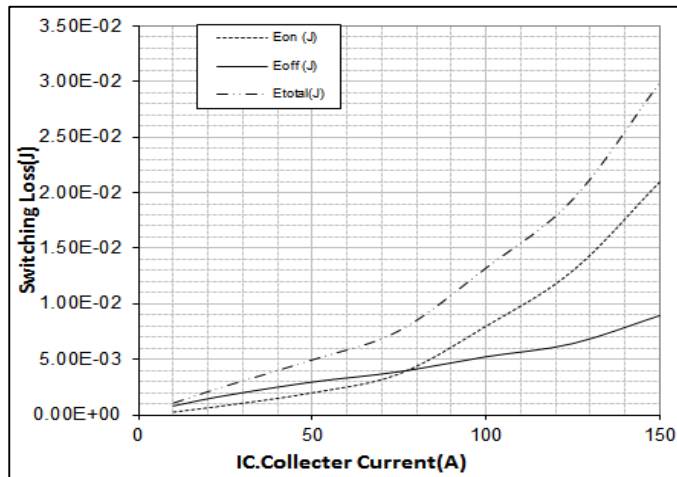
VGE=15V, VCE=600V, IC=75A, Rg=10Ω

**Switching Loss vs. Tj**

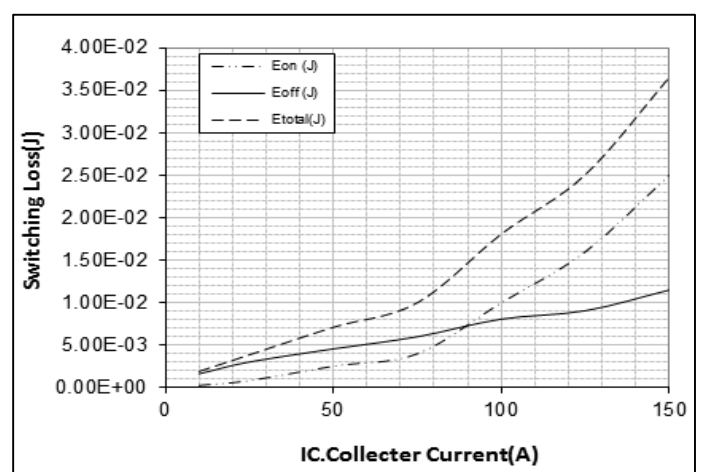
VGE=15V, VCE=600V, IC=75A, Rg=10Ω

**Switching Loss vs. IC(25°C)**

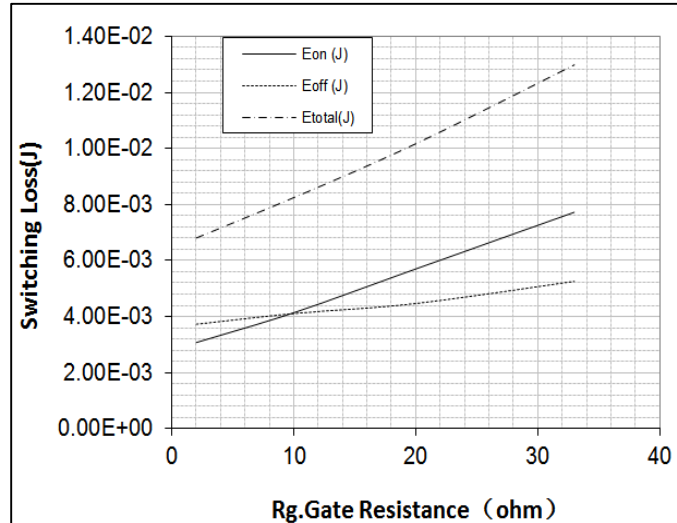
VGE=15V, VCE=600V, Rg=10Ω

**Switching Loss vs. IC(175°C)**

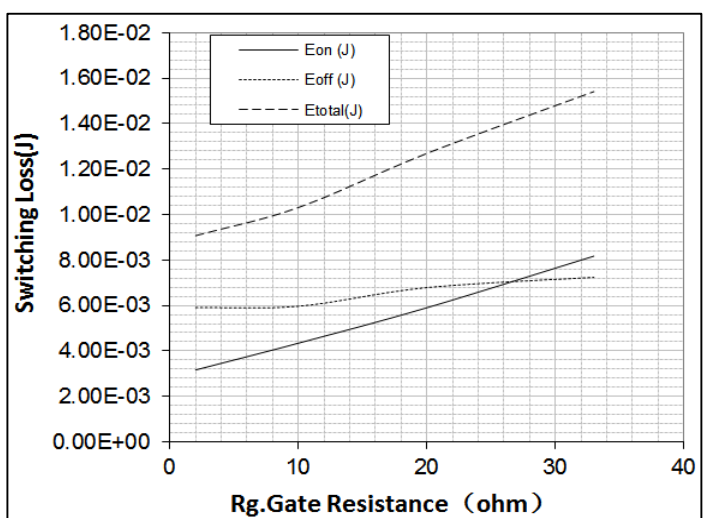
VGE=15V, VCE=600V, Rg=10Ω

**Switching Loss vs. Rg(25°C)**

VGE=15V, VCE=600V, IC=75A

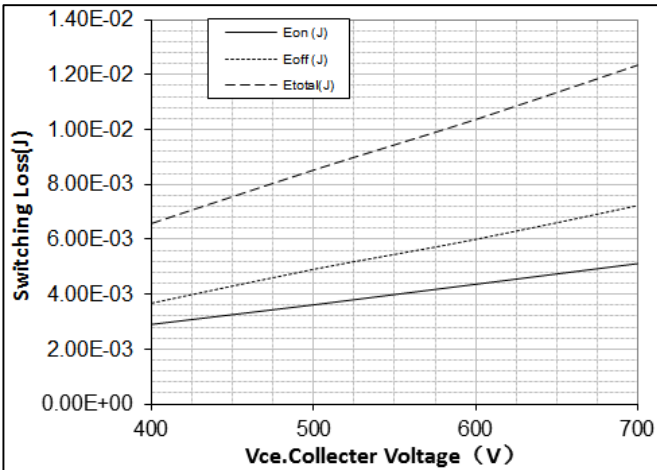
**Switching Loss vs. Rg(175°C)**

VGE=15V, VCE=600V, IC=75A

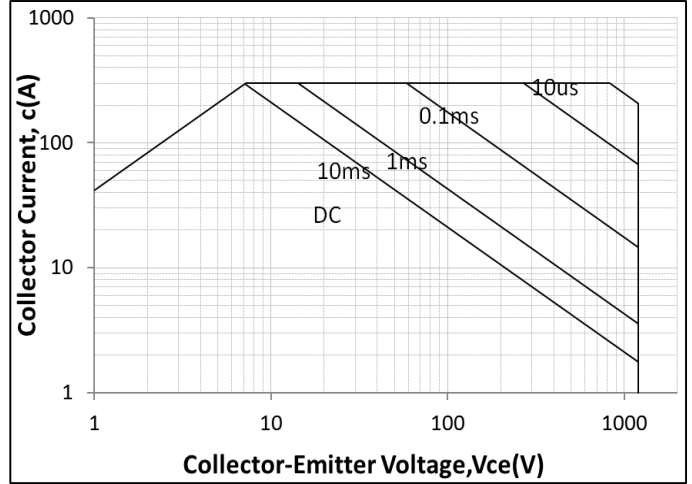
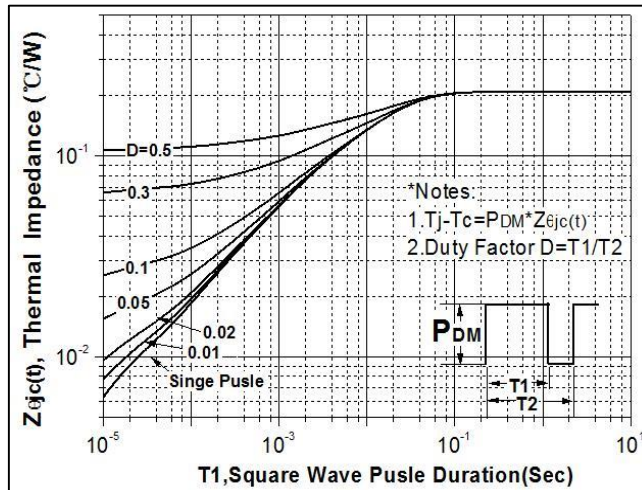


**Switching Loss vs. VCE(175℃)**

VGE=15V, IC=75A, Rg=10Ω

**Forward Bias SOA**

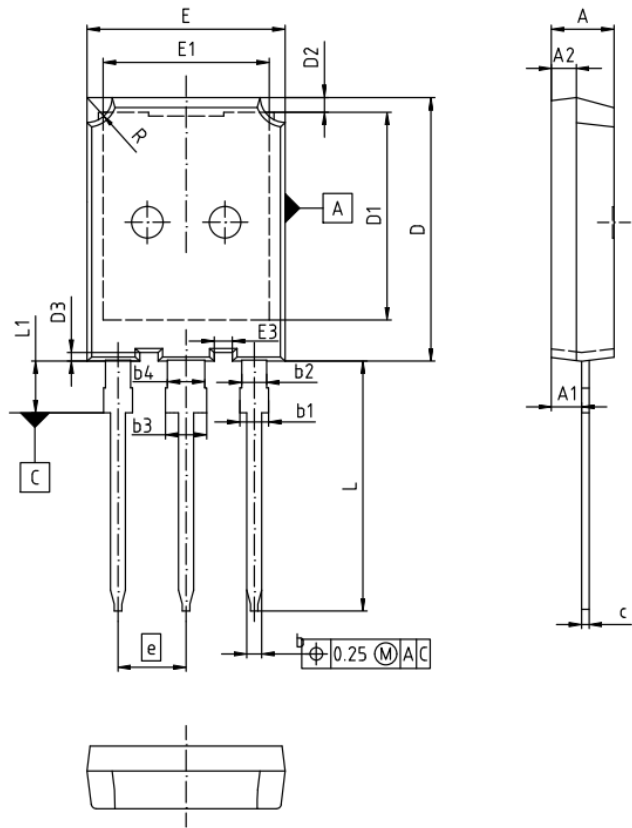
Tc=25℃, VGE=15V, Tj≤175℃

**Normalized Maximum Transient Thermal Impedance for IGBT**



外形尺寸 PACKAGE MECHANICAL DATA

TO-247PLUS



单位 Unit : mm

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.201
A1	2.31	2.51	0.091	0.099
A2	1.90	2.10	0.075	0.083
b	1.16	1.26	0.046	0.050
b1	1.96	2.25	0.077	0.089
b2	1.96	2.06	0.077	0.081
c	0.59	0.66	0.023	0.026
D	20.90	21.10	0.823	0.831
D1	16.25	16.85	0.640	0.663
D2	1.05	1.35	0.041	0.053
D3	0.58	0.78	0.023	0.031
E	15.70	15.90	0.618	0.626
E1	13.10	13.50	0.516	0.531
E3	1.35	1.55	0.053	0.061
e	5.44 (BSC)		0.214 (BSC)	
N	3		3	
L	19.80	20.10	0.780	0.791
L1	-	4.30	-	0.169
R	1.90	2.10	0.075	0.083



注意事项

1. 吉林华微电子股份有限公司的产品销售分为直销和销售代理，无论哪种方式，订货时请与公司核实。
2. 购买时请认清公司商标，如有疑问请与公司本部联系。
3. 在电路设计时请不要超过器件的绝对最大额定值，否则会影响整机的可靠性。
4. 本说明书如有版本变更不另外告知。

NOTE

1. Jilin Sino-microelectronics co., Ltd sales its product either through direct sales or sales agent , thus, for customers, when ordering , please check with our company.
2. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
3. Please do not exceed the absolute maximum ratings of the device when circuit designing.
4. Jilin Sino-microelectronics co., Ltd reserves the right to make changes in this. specification sheet and is subject to change without prior notice.

联系方式

吉林华微电子股份有限公司

公司地址：吉林省吉林市深圳街 99 号

邮编：132013

总机：86-432-64678411

传真：86-432-64665812

网址：www.hwdz.com.cn

CONTACT

JILIN SINO-MICROELECTRONICS CO., LTD.

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64678411

Fax: 86-432-64665812

Web Site: www.hwdz.com.cn

